

Long Distance Wiegand Reader



UHF 10 series



UHF 5 series



UHF 5 series and UHF 10 series reader are a new generation of UHF RFID series products for our company's independent research and development of the long distance card reader system in the personnel management, goods management and vehicle management.

The product uses the industry's most cost-effective UHF card reader chip, and the part of swing card adopts the module integrated design, making the product to meet the technical requirements of the parking lot. Meanwhile, the utility model has the advantages of stable reading performance, good consistency, low working current and temperature, long service life, and small external influence, and the product adopts the waterproof outer shell design.

The product is also a fully meet the CE, FCC technology requirements of the product, and to obtain CE, FCC and other security certification.


Features

- Read range up to 12 meters (adjustable)
- Read Sensitivity: Line polarization read mode
- Wiegand -26Bit (Can change to -34Bit via software)
- Two working mode: Trigger read & Always read(Default)
- Comes with the mounting plate
- Weatherproof (IP66)
- Maximum Cable Distance: 100m
- Multiple label recognition
- Wide application: Vehicle management, Personnel management and Goods management


Specifications

Model	UHF5-1E,UHF5-1F	UHF10-1E,UHF10-1F
Dimension	65*260*260(mm)	70*445*445(mm)
Reading distance	Up to 6 meters (adjustable)	Up to 12 meters (adjustable)
communication interface	Wiegand 26(Default) /Wiegand 34, USB	
Frequency	902Mhz – 926Mhz, 865MHz – 868MHz	
Shell Material	Antenna Panel:ABS Engineering Plastics; Back Cover:Aluminum Shell	
Working Voltage	12~9V DC	
Working Current	150mA(Always Read)	
Working Temperature	20- °C - 60 °C	
Interface Protocol	EPC global UHF Class 1Gen 2/ISO 6-18000c	
Multiple tags identification	<100	
Working mode	Always read(Default) /Trigger read	
I/O Interface	Supports external trigger	
Maximum power consumption	<3W (RF output 26dBm,multiple tags), <2W (RF output 26dBm,Sigle tags)	

Configuration

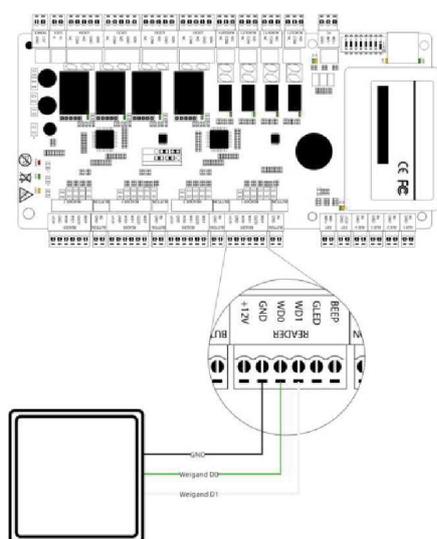

Dimensions(mm)

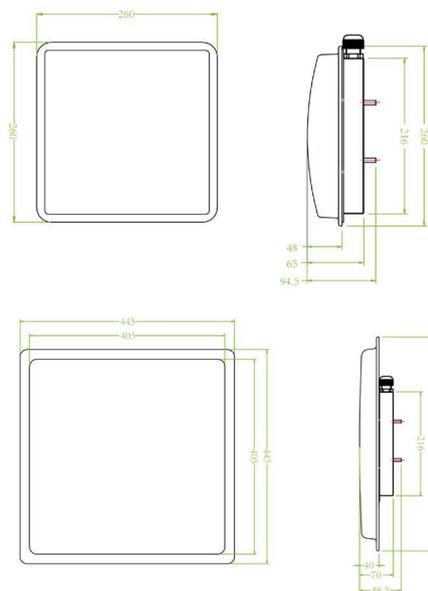

ZKTECO CO.,LTD.
www.zkteco.com
 E-mail: sales@zkteco.com

© Copyright 2017 ZKTECO CO.,LTD. ZKTECO Logo is a registered trademark of ZKTECO or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.